

TNS SERIES NUT SPLITTER CUT IT LOOSE

THE TORCUP TNS SERIES NUT SPLITTER IS THERE WHEN YOU JUST CANNOT TURN THE NUT. ELIMINATING THE NEED FOR TORCHES AND OTHER LESS PREDICTABLE OPTIONS, THE TNS SERIES NUT SPLITTER IS DURABLE, RELIABLE AND SAFE. ITS SIMPLE DESIGN AND WIDE RANGE MAKE IT THE MOST IN-DEMAND NUT SPLITTER AVAILABLE. THE TNS SERIES NUT SPLITTER IS MADE IN THE USA AND PROVIDES AN UNCOMPLICATED SOLUTION TO WHAT CAN BE A DIFFICULT ISSUE.

THE RIGID DESIGN

EASY SETS UP AND CUTS WITHIN MINUTES

SAFE NO SPARKS, NO FLAMES, NO FLYING FRAGMENTS


FAST CUTS NUTS IN SECONDS COMPARED TO HOURS WITH TORCH


FLEXIBLE TOOL HEAD FITS ALL API AND ANSI FLANGES

VERSATILE CUTS NUTS WITHOUT ANY DAMAGE TO STUD

FOR PEACE OF MIND...

WARRANTY CARRIES 13 MONTH FACTORY WARRANTY FROM DEFECTS IN MATERIAL AND/OR WORKMANSHIP (EXCLUDES WEAR PARTS SUCH AS CHISELS)



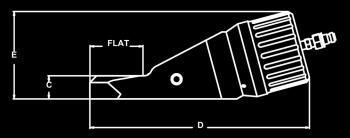



POWER ENGINEERED

PART NUMBER	А	В	С	D	E	FLAT	CHISEL	RANGE
TNS-012 (in)	2.00	0.40	0.63	6.71	2.76	1.11	TNS-10T-CHISEL	1/2 - 3/4
TNS-012 (mm)	50.8	10.2	15.9	170.4	70.1	28.2		12-19
TNS-100 (in)	2.25	0.40	0.72	6.94	2.77	1.3	TNS-10T-CHISEL	13/16 - 1
TNS-100 (mm)	57.2	10.2	18.3	176.3	70.4	33		20-25
TNS-104 (in)	3.75	1.00	1.13	11.79	5.07	2.63	TNS-30T-CHISEL	1 1/16 -1 1/4
TNS-104 (mm)	95.3	25.4	28.6	299.5	128.8	66.7		27-32
TNS-108 (in)	3.75	1.13	1.13	12.19	5.08	2.53	TNS-30T-CHISEL	1 5/16 -1 1/2
TNS-108 (mm)	95.3	28.7	28.7	309.6	129.0	64.3		33-38
TNS-112 (in)	4.50	1.38	1.25	13.95	5.71	3.23	TNS-50T-CHISEL	1 9/16 -1 3/4
TNS-112 (mm)	114.3	34.9	31.8	354.3	145.0	82.0		39-45
TNS-200 (in)	5.00	1.50	1.5	14.23	5.68	3.52	TNS-50T-CHISEL	1 13/16 - 2
TNS-200 (mm)	127	38.1	38.1	361.4	144.3	89.4		46-50
TNS-208 (in)	6.25	1.50	2.00	18.19	7.75	3.63	TNS-75T-CHISEL	2 1/16 - 2 1/2
TNS-208 (mm)	158.8	38.1	50.8	462	196.9	92.2		50-63
TNS-300 (in)	6.50	1.53	2.50	18.57	7.70	4.50	TNS-75T-CHISEL	2 9/16 - 3
TNS-300 (mm)	165.1	38.8	63.5	471.7	195.6	114.3		63-76





Features

Single Acting / Single Hydraulic Port Two-stage operation which reduces user fatigue Internal pressure relief valve for overload protection Large oil capacity to power a wide range of tools Constructed of high strength lightweight aluminum alloy Functions in horizontal and vertical positions Maximum working pressure: 10,000 psi / 700 bar





HYDRAULIC AIR PUMP

Single Acting / Single Hydraulic Port Pressure relief valve for overload protection

High strength reinforced alloy reservoir

Required air pressure range: 110-175psi. / 7.5-12 bar

Dust cover protection for the release control valve

Maximum working pressure: 10,000 psi / 700 bar

Features



Features

Single Acting / Single Hydraulic Port Quiet operation meets OSHA regulations (80dBA) 2 speed operation allows for faster cylinder advance Internal filter keeps contamination from damaging pump 10 ft. remote pendant switch to control motor on/off Maximum working pressure: 10,000 psi / 700 bar



Worldwide Headquarters

1025 Conroy Place Easton, PA 18040 USA TOLL FREE: 1-888-TorcUP-1 TELEPHONE: 1-610-250-5800 FAX: 1-610-250-2700 www.torcup.com f () () () ()

TorcUP products are subject to continual development and TorcUP reserves the right to make changes to the specifications and design of their products without prior notice. All rights are reserved. Reproduction in whole or in part without permission of TorcUP Inc. is prohibited.